# ECOSTREAM™

## Compact Delivery & DI Tank Systems



ECO-700DI-03

## ERGONOMIC WATER DELIVERY SYSTEM

Due to its compact size and the fact all components are housed within the tank footprint, the Ecostream™ takes up little room, even in smaller vans, allowing space for other equipment. Supplied ready for use / easy installation Ecostream Range from 255ltr to 700ltr.

The Ecostream™ tank systems represent excellent value for money and can be fixed into vehicles permanently without the need of a stainless steel frame to do so. This allows significant savings to be made over against traditional systems, without compromising on the professional image that window cleaners always strive for. These tanks are constructed as water delivery systems, or DI filtration baffled to restrict water movement in transit.

### BRAND NEW DESIGN

Ecostream has been a staple tank system over many years our latest model is the best yet with easy to access pumps, batterys and upgraded controllers.

### OPTIONAL DI FILTRATION

Deionized filtration involves passing water through a resin bed where ions like calcium, magnesium, iron, and sodium are exchanged for hydrogen and hydroxyl ions, resulting in highly purified water.

### EFFICIENT BATTERY

All Ecostream™ tanks contain a lithium ion battery which can be easily removed to recharge. (No need of complex split charge required.)

### SAFETY IN MIND

The Streamline Ecostream range is uses the Z-profile securing flange which we have extensivley crash tested to ensure ultimate safety precautions for our customers.



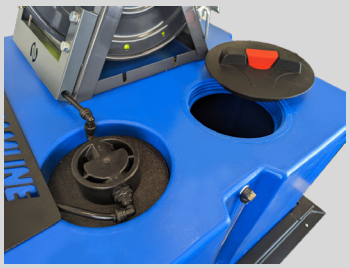




# ECOSTREAM™ 255

## FEATURES

Crash tested z-profile securing flange

Optional DI filtration

Water Level Site Gauge

Streamline™ SFC16 Digital Controller with battery voltage level

Streamline® Lithium-Ion compact removable battery with USB port

Shut Off Fill Float

| Specification | ECOSTREAM™ 225 |
|---|---|
| Product codes | 100mtr hose: ECO255-03 / ECO255DI-03 |
| Size (exc. DI) | 964mm (H) x 913mm (W) x 1113mm (D) |
| Capacity | 255 Litres |
| Pump | 100 PSI / 6.89 Bar |
| Max. flow rate | 4.6 litres/minute |
| Battery charge time | 5 hours |
| Run time | Approx 8 hours |
| Operators | Single operator |
| Hose options | 100m 6mm diameter HI-Viz hose |
| Weight | 86kg / DI 95kg |
| Wet weight | 341kg / DI 350kg |






# ECOSTREAM™ 375

## FEATURES

Crash tested z-profile securing flange

Streamline™ SFC16 Digital Controller with battery voltage level

Optional DI filtration

Streamline® Lithium-Ion compact removable battery with USB port

Water Level Site Gauge

Shut Off Fill Float

| ECOSTREAM™ 375 | Specification |
|---|---|
| Product codes | 50mtr hose: ECO375-02 / ECO375DI-02<br>100mtr hose: ECO375-03 / ECO375DI-03 |
| Size (exc. DI) | 990mm (H) x 913mm (W) x 1320mm (D) |
| Capacity | 375 Litres |
| Pump | 100 PSI / 6.89 Bar |
| Max. flow rate | 4.6 litres/minute |
| Battery charge time | 5 hours |
| Run time | Approx 8 hours |
| Operators | Single operator |
| Hose options | 50m 6mm diameter HI-Viz hose<br>100m 6mm diameter HI-Viz hose |
| Weight | 50m hose **91.5kg** / 50m hose DI **108kg**<br>100m hose **99.5kg** / 100m hose DI **116kg** |
| Wet weight | 50m hose **466.5kg** / 50m hose DI **483kg**<br>100m hose **474.5kg** / 100m hose DI **491kg** |

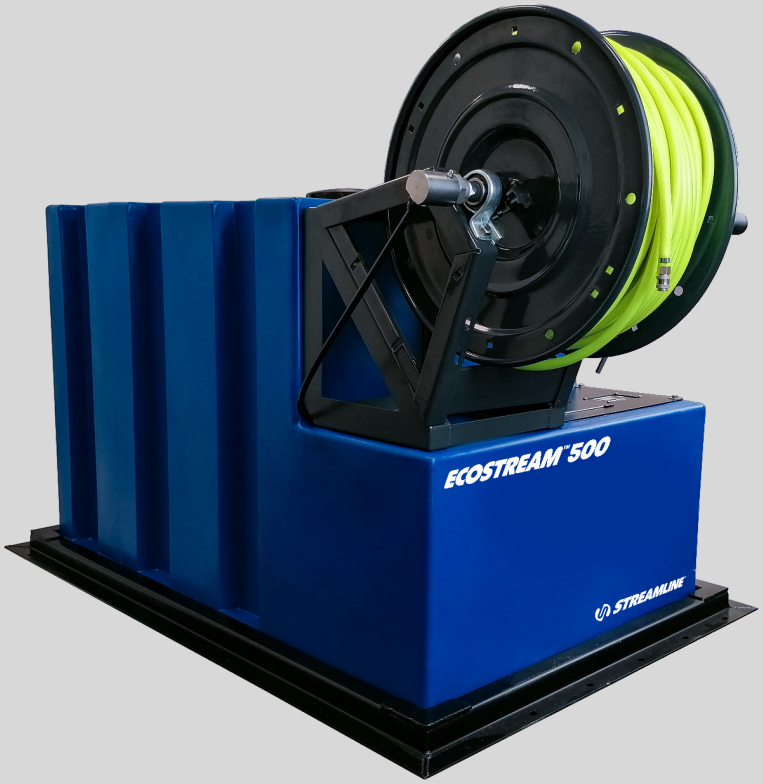





# ECOSTREAM™ 500

## FEATURES

Crash tested z-profile securing flange

Optional DI filtration

Water Level Site Gauge

Streamline™ SFC16 Digital Controller with battery voltage level

Streamline® Lithium-Ion compact removable battery with USB port

Shut Off Fill Float

| ECOSTREAM™ 500 | Specification |
|---|---|
| Product codes | 50mtr hose: ECO500-02 / ECO500DI-02<br>100mtr hose: ECO500-03 / ECO500DI-03 |
| Maxinum Size | 781mm (H) x 913mm (W) x 1560mm (D) |
| Tank | 500 Litre Baffled Tank |
| Pump | 100 PSI / 6.89 Bar |
| Max. flow rate | 4.6 litres / minute |
| Battery charge time | 5 hours |
| Run time | Approx 8 hours |
| Operators | Single operator |
| Hose options | 50m 6mm diameter HI-Viz hose<br>100m 6mm diameter HI-Viz hose |
| Weight | |
| Wet weight | |







# ECOSTREAM™ 700

## FEATURES

Crash tested z-profile securing flange

Optional DI filtration

Water Level Site Gauge

Streamline™ SFC16 Digital Controller with battery voltage level

Streamline® Lithium-Ion compact removable battery with USB port

Shut Off Fill Float

| ECOSTREAM™ 700 | Specification |
|---|---|
| Product codes | ECO700-03 / ECO700DI-03 |
| Maxinum Size | 1154mm (H) x 1013mm (W) x 1563mm (D) |
| Capacity | 700 Litres |
| Pump | 100 PSI / 6.89 Bar |
| Max. flow rate | 4.6 litres/minute |
| Battery charge time | 5 hours |
| Run time | Approx 8 hours |
| Operators | Dual operator |
| Hose | Twin 100m 6mm diameter Hi-Viz hose |
| Weight | 139kg / DI 145kg |
| Wet weight | 839kg / 845kg |